

NT-SFP28-25G-SR

25GBASE-SR SFP28 Transceiver Module, Multimode, 850nm, 100m Reach

Features

- Supports up to 25.78Gbps bit rates
- Hot-pluggable SFP28 footprint
- Compliant with SFP28 MSA and SFF-8472
- 850nm Oxide VCSEL transmitter, PIN photo-detector
- Distance up to 70m on OM3 and 100m on OM4 Multimode fiber
- Duplex LC connector
- Built-in digital diagnostic functions
- Single +3.3V power supply
- Power consumption less than 1.0 W
- Metal enclosure, for lower EMI
- ROHS compliant and lead-free
- Operating Temperature: Standard 0~70°C, Industrial -40~85°C



Applications

- 25GBASE-SR 25G Ethernet
- 25.78125 Gb/s single lane 100GE SR4
- Other optical links

Description

Netiks 25GBASE-SR SFP28 transceiver is a high performance and cost-effective SFP28 SR optical transceiver module for 25 Gigabit Ethernet application. This SFP28 SR optics module features a highly reliable 850nm VCSEL transmitter and PIN photo-detector into duplex LC optical connector, providing links up to 70m over OM3 or 100m over OM4 multi-mode fiber.

The SFP28 SR transceiver optics complies with the current specifications of IEEE 802.3, SFF-8472, SFF-8402, SFF-8432 and SFF-8431. It's suitable for use with 25GbE Ethernet switches, routers, network interface cards (NICs) and storage networking equipment. The SFP28 SR optics offers the most power-efficient way to meet the growing needs of the next-generation data center networking environment.

Additionally, the SFP28 SR transceiver optics has been integrated with a digital diagnostic monitoring interface (DDMI) per SFF-8472, which provides real-time monitoring of the transceiver temperature, laser bias current, optical power, received optical power and transceiver supply voltage. All SFP28 transceiver optics are Class 1 laser products comply with FDA/CDRH and IEC-60825 standards.

There are two versions of the series 25GBASE-SR SFP28 transceiver for different applications. The Standard grade (0~70°C) is for commonly commercial application, the Industrial grade (-40~85°C) is made with robust and reliable components to meet the needs of Industrial Ethernet application under harsh environmental conditions. Industrial optical transceivers have an "IND" suffix in the PN.

Transceiver functional diagram



Parameter	Symbol	Min	Max	Unit	Notes
Maximum Supply Voltage	V _{CC}	-0.5	4.5	V	
Storage Temperature	T _S	-40	85	°C	
Operating Humidity	RH	5	85	%	

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc			300	mA	
Case Operating Temperature	Tc	0		70	°C	Standard
		-10		85	°C	Extended
		-40		85	°C	Industrial
Data Rate	BR		25.78125		Gbps	

Fiber Type	850nm OFL					
62.5μm	160 MHz-km	Lmax		-	m	
	OM1 200 MHz-km			-		
50μm	400 MHz-km	Lmax		-		
	OM2 500 MHz-km			-		
	OM3 2000 MHz-km			70		
	OM4 4700 MHz-km			100		

Optical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Transmitter						
Centre Wavelength	λ_c	840	850	860	nm	

Receiver

1. The optical power is launched into MMF.
2. PECL input, internally AC-coupled and terminated.
3. Measured with worst ER=2.0dB, RPBS 2³¹-1 test pattern @25.78125Gbps BER=<5E-5.
4. Internally AC-coupled.

Parameter	Symbol	Min	Typical	Max	Unit
Tx Disable Negate Time	t_on			1	ms
Tx Disable Assert Time	t_off			10	μs
Time To Initialize, including Reset of Tx Fault	t_init			300	ms
Tx Fault Assert Time	t_fault			100	μs
Tx Disable To Reset	t_reset	10			μs
LOS Assert Time	t_loss_on			100	μs
LOS De-assert Time	t_loss_off			100	μs
Serial ID Clock Rate	f_serial_clock		100	400	KHz
MOD_DEF (0:2)-High	V _H	2		V _{cc}	V

MOD_DEF (0:2)-Low	V _L			0.8	V
-------------------	----------------	--	--	-----	---

Diagnostics


Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal
	-10 to +85			
	-40 to +85			
Voltage	3.0 to 3.6	V	±3%	Internal
Bias Current	0 to 20	mA	±10%	Internal
TX Power	-8.5 to +3.0	dBm	±3dB	Internal
RX Power	-14 to +3.0	dBm	±3dB	Internal

Digital Diagnostic Memory Map


The 25GBASE-SR SFP28 transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following.

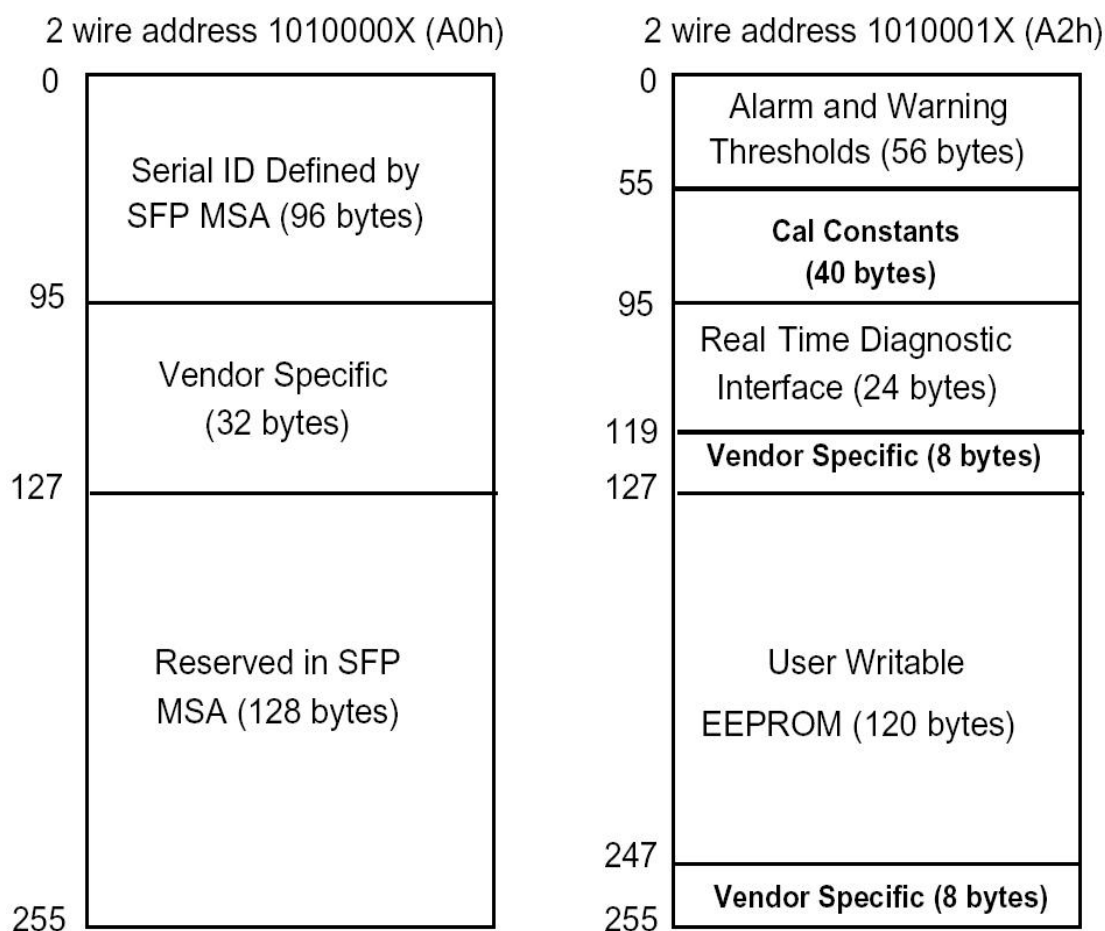

Pin Definitions

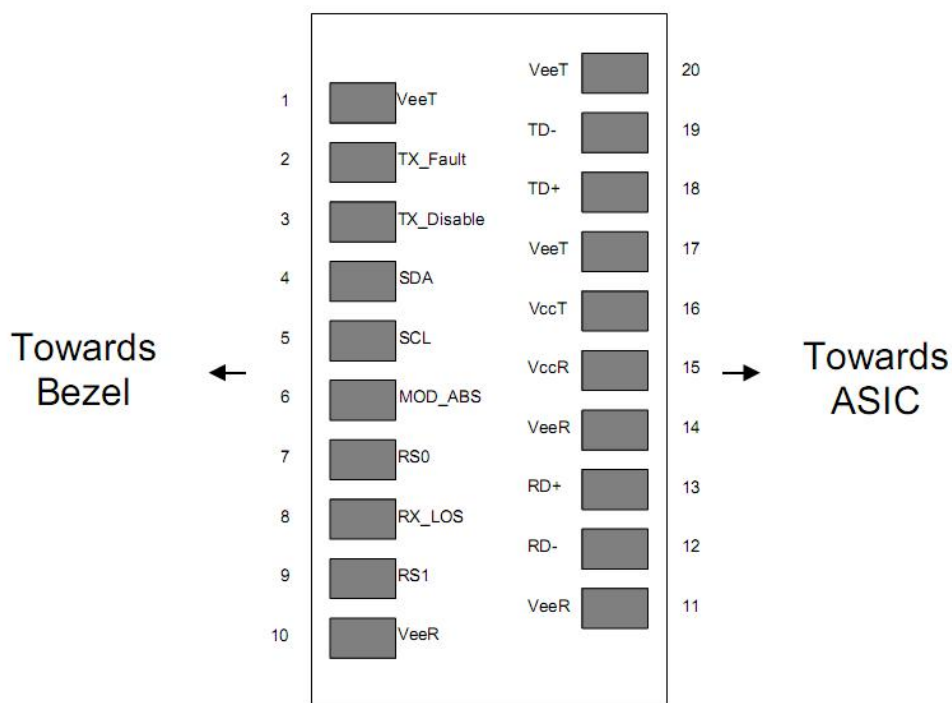

Pin Descriptions


Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	
6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	Note 3
9	RS1	Not Connected	3	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 4
13	RD+	Received Data Out	3	Note 4
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 5
19	TD-	Inv. Transmit Data In	3	Note 5
20	V _{EET}	Transmitter Ground	1	

Notes:


Plug Seq.: Pin engagement sequence during hot plugging.

1. Open collector/drain output, which should be pulled up with a 4.7kΩ to 10kΩ resistor on the host board if intended for use. Pull up voltage should be between 2.0V to 3.6V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
2. Laser output disabled on Tx_Disable >2.0V or open, enabled on Tx_Disable <0.8V.
3. LOS is open collector output. Should be pulled up with 4.7kΩ to 10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
4. RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES.
5. TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.


Recommended Interface Circuit

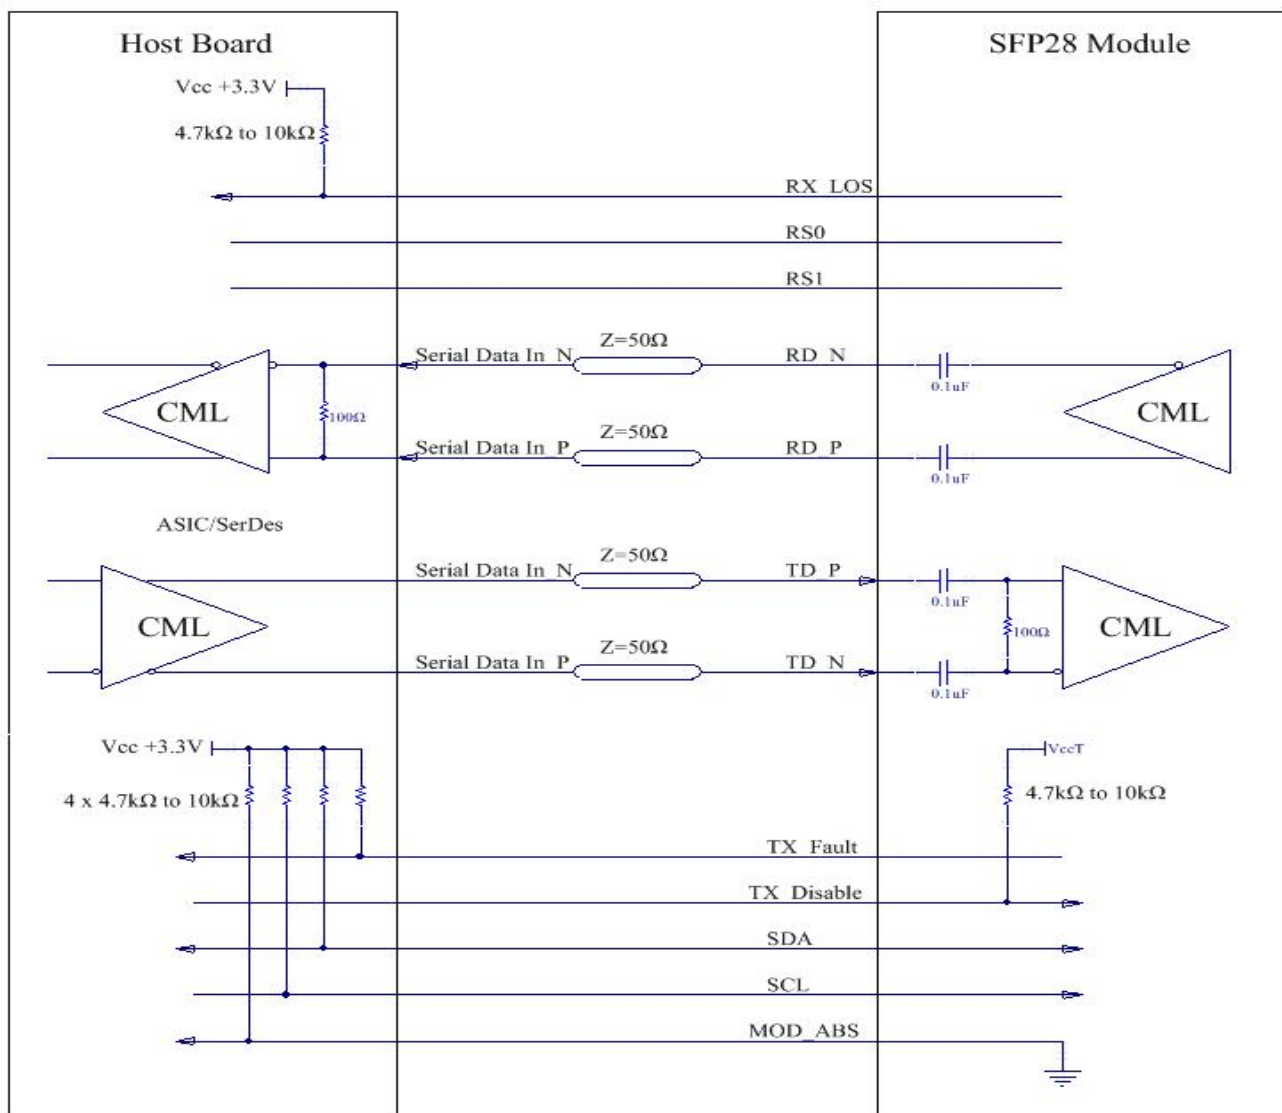

Recommended Host Board Power Supply Circuit

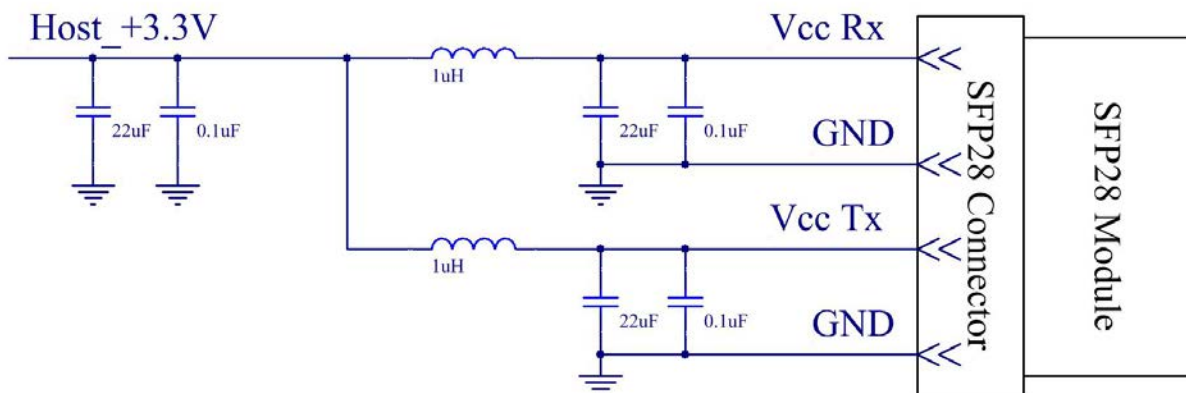

Mechanical Dimensions

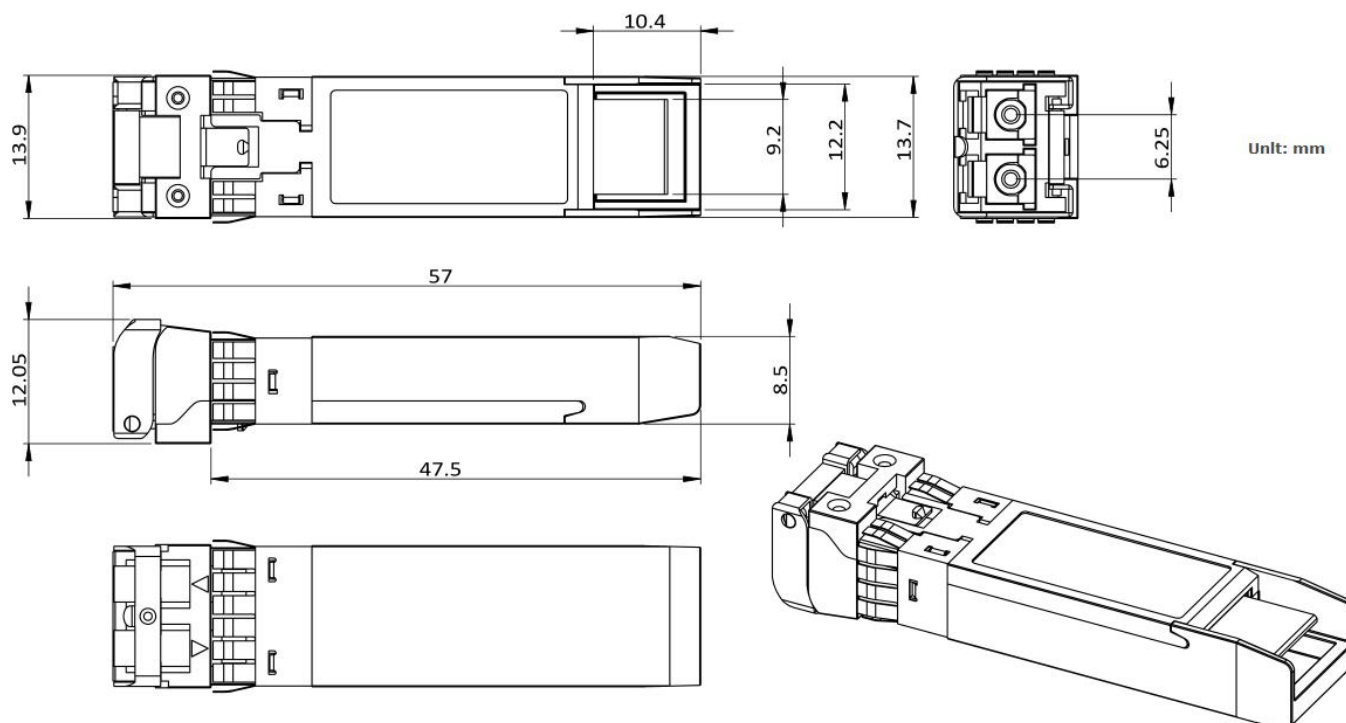

Ordering information

Part number	Description
NT-SFP28-25G-SR	25GBASE-SR SFP28 Transceiver, Multi-mode, 850nm, 100m, LC, DDM, 0°C~+70°C
NT-SFP28-25G-SR-IND	25GBASE-SR SFP28 Industrial TR, Multi-mode, 850nm, 100m, LC, DDM, -40°C~+85°C

Warnings

Process plug

The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

Handling Precautions

The transceiver optics is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety

The transceiver optics is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Standards

Netiks optical transceivers comply with the requirements set out in the Council Directive relating to Electromagnetic Compatibility Directive on (2014/30/EU). For the evaluation regarding the EMC, the following standards were applied:

EN 55032 (2012+AC: 2013)

EN 61000-3-2 (2014)

EN 61000-3-3 (2013)

EN 55024 (2010)

For more product information, visit us on the web at www.netiks.rs



Copyright © 2021 Netiks. All rights reserved. NT-SFP and Netiks logo are registered trademarks of Netiks Co., Ltd. All other brands, product names, or trademarks mentioned are the property of their respective owners. Specifications and product availability are subject to change without notice. Netiks assumes no responsibility for inaccuracies contained herein.

